



Non-Transferable Windshield Tag Mounting Instructions

Infinity RFID, Inc.'s Windshield Mount Tags are high-performance radio frequency identification devices (RFID). They have been designed to be installed on the interior or exterior of a vehicle, specifically on surfaces that are made of glass. Windshield tags are designed in a way to not interfere with the vision of the driver. They offer an unmatched level of security when properly installed. They are designed to destruct if removed or tampered with once mounted to the vehicle.


The windshield tags, supplied by Infinity RFID Inc., have been tested to withstand a variety of environmental conditions such as UV exposure, vibration, windblown sand, and temperature as well as humidity cycles. They are also able to withstand both automated and hand car washing regularly. Although this tag has been engineered for the rigors of outdoor use once it is installed, it must be handled carefully during the installation process.





Note - Due to the wide variance in windshield design and local vehicle codes, this document is intended as a general guide and not inclusive of all vehicle makes and models. Please use the following guidelines in this product bulletin for choosing a suitable mounting location, as well as proper handling and installation of the tag.

Choosing a Proper Mounting Location

For optimum performance, the RFID tag must be installed on a windshield location or other suitable mounting point that is facing the RFID reader during normal driving.

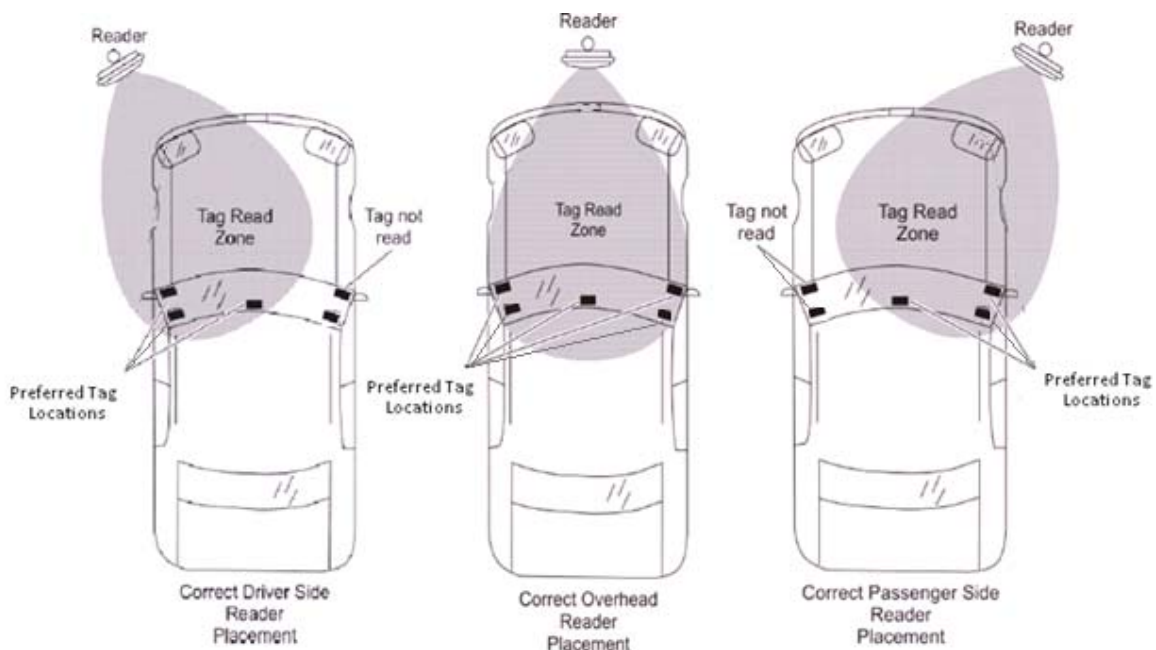

The diagrams below show suitable mounting locations of windshield tags. Choose a mounting location for the tag at least 2.5" from any materials containing metal. This includes the vehicle roofline, side pillars and rearview mirror mounting block.

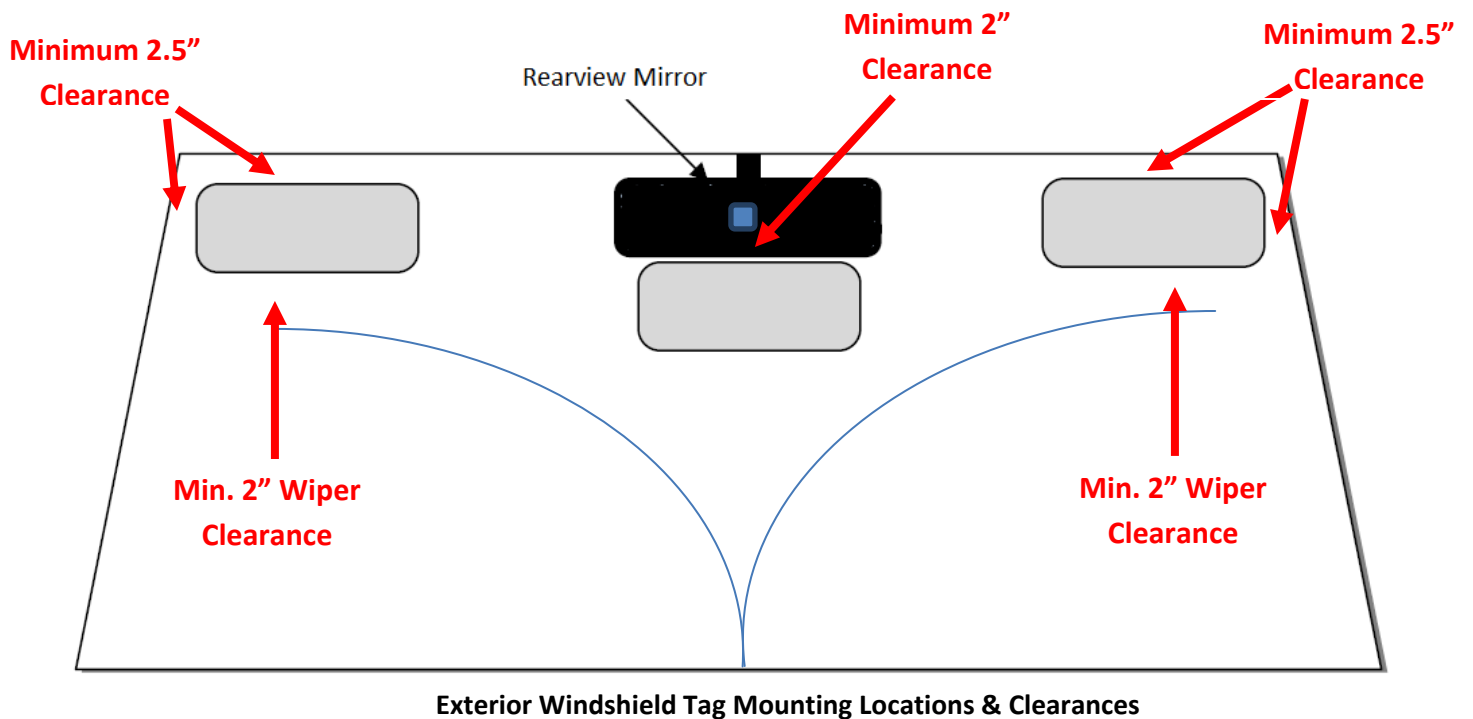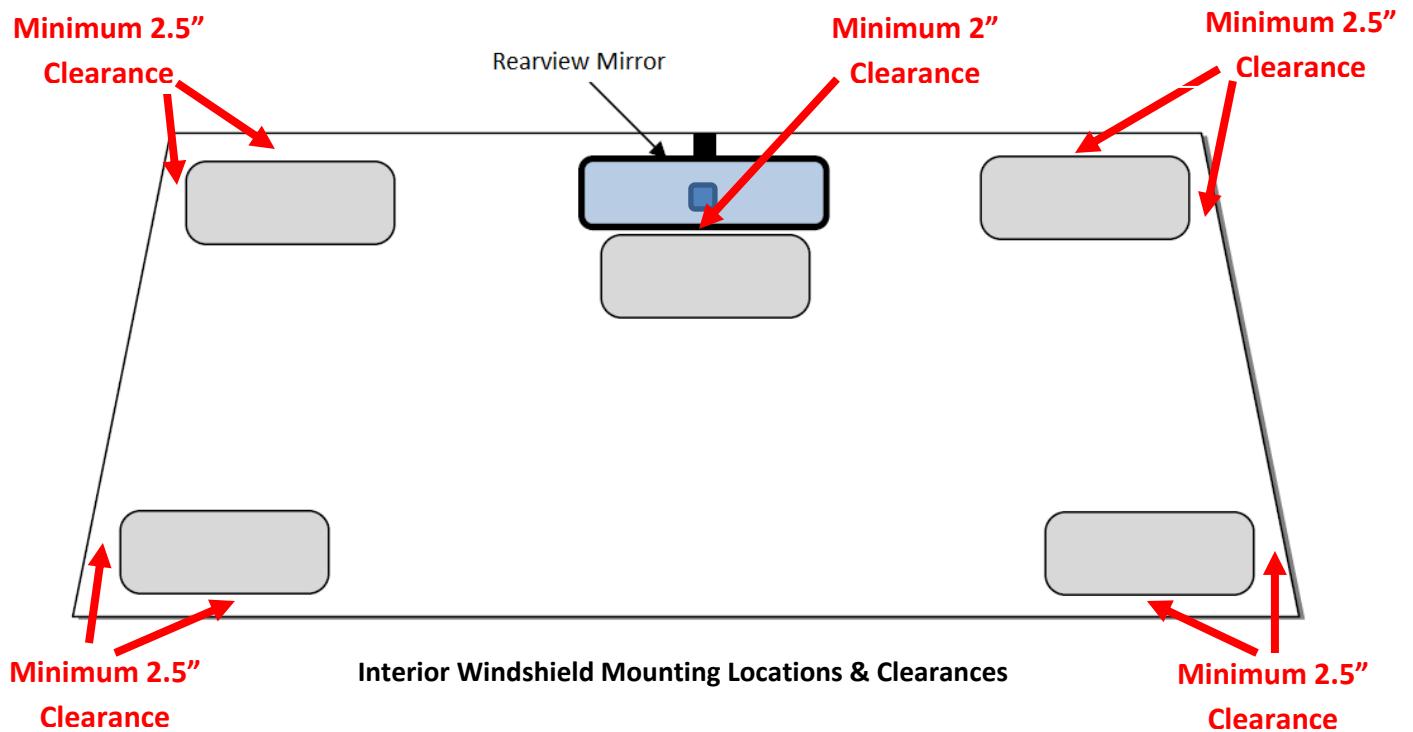

Tag Handling & Installation

Step 1 - Make sure that the intended mounting surface is clean and free of any contaminants.

Note - Handle the tag with care during installation. Do not excessively bend or distort the tag when removing it from the liner.



Step 2 -Transfer the tag to the location on the vehicle that you have determined suitable for your application. It is best to apply the tag by the edges as shown in the picture below.



Step 3 -Smooth out the tag to ensure complete adhesion and remove any air pockets.



Note - Once the tag has been mounted, **do not attempt to remove the tag**. This will damage the tag.



Cure Time

Once the tag has been installed on the vehicle, there will be a period of time necessary to allow the tag's adhesive to cure. Due to temperature and humidity variations the total cure time may vary. Most applications will experience an 80% cure of the adhesive within 1 hour and full adhesive cure within 24 hours of application. **Please do not wash the vehicle or disturb the tag for 24 hours after installation.**

*Infinity***RFID**, *Inc.*

www.infinityRFIDinc.com